

RAILEX[®] Corp.

System 520 ~ GARMENT CONVEYOR



Description:

System 520 is designed for conveying garments on wire hangers horizontally or vertically up to inclines of 60°. It consists of motor driven endless roller links moving hangered garments on UHMW bearing surfaces. There is no lubrication, and therefore no contamination of rail or garments. Transfer to continuous accumulation rail is automatic.

Installation:

Furnished completely assembled and tested; ready to suspend.

Features:

- ◆ *Quiet, clean, lubrication free operation.*
- ◆ *Easy installation. Ready to suspend.*
- ◆ *Self contained return. No lubrication required.*
- ◆ *Continuous operation. Automatic transfer.*

Applications:

- ◆ *Dry Cleaning*
- ◆ *Uniform Rental*
- ◆ *Laundries*
- ◆ *Garment Distribution*
- ◆ *Linen Supplies*
- ◆ *Garment Manufacturing*

Standard Equipment

Drive: Continuous duty 1/6 hp.


Load: Garments on hangers

Capacity: 2,700 Garments/hr.

Electrical: 110/230 V, 50/60 Hz.

Speed: 45 feet per minute.

Lubrication free rail ◆ Suspension point every 4' ◆ Intermediate size available

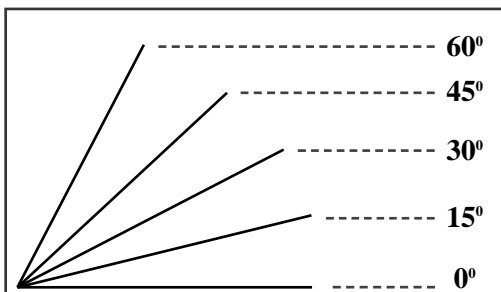

MODEL	CONVEYING LENGTH IN FEET	ELEVATION CHANGE IN FEET				
		0°	15°	30°	45°	60°
520-5	5	0	1.3	2.5	3.5	4.3
520-10	10	0	2.6	5.0	7.1	8.7
520-15	15	0	3.5	7.5	10.6	13.0
520-20	20	0	5.2	10.0	14.1	17.3

ADD 1 FT. TO CONVEYING LENGTH TO OBTAIN OVERALL LENGTH.